


BEXCOFLOAT 8 STRAND



Construction

Plaited ropes of the BEXCOLINE range are well established in marine and off-shore applications, because of their ease in handling and non-rotating behaviour. They are produced on a plaiting machine containing eight reels, each containing one strand, groups of two reels interweave as a pair around the other pairs of reels to produce an eight strands rope of a somewhat square cross section.


Material Properties

Bexcofloat is a mixed or composite fibre based on our proprietary BEX- yarn and polyester as a strength member, with excellent fatigue characteristics and abrasion resistance. A special marine finish is applied to further increase the wear resistance in a marine environment. This finish has been tested conform ASTM D6611-00. The rope is floating, has a very high breaking load for a given diameter and has excellent handling characteristics. Wet and dry strength is identical.

Features

➤	Materials	High tenacity BEX-yarn High tenacity polyester
➤	Construction	8 strand plaited
➤	Treatment	Marine finish
➤	Colour of Rope	Light orange plus two blue marker yarns
➤	Approx. Spec. Density	0,99 floating
➤	Melting point	165°C / 260°C
➤	Abrasion Resistance	Very good
➤	U.V. resistance	Good
➤	Temperature resistance	70°C max continuous
➤	Chemical resistance	Good, solvents and strong oxidisers may have a mild effect
➤	Dry & wet conditions	Wet strength equals dry strength
➤	Range of use	Fishing, inland shipping, merchant, navy, industry, mooring
➤	Coil length	220m
➤	Spliced strength	± 10% lower
➤	Weight and length tolerance	± 5%
➤	Diameter	± 2%

Dia	Circ.	Min Break Load		Weight	
		tf	kN	kg/100 m	kg/coil
32	4	16,5	162	43,3	95
36	4 1/2	20,8	204	52,9	116
40	5	30,2	296	72,2	159
44	5 1/2	36,5	358	91,5	201
48	6	43,0	422	106	233
52	6 1/2	50,5	495	126	277
56	7	58,0	569	145	319
60	7 1/2	66,0	647	164	361
64	8	75,0	736	188	414
68	8 1/2	84,5	829	213	469
72	9	94,5	927	237	521
76	9 1/2	103	1015	261	574
80	10	116	1137	295	649
88	11	139	1363	352	774
96	12	165	1618	417	917
104	13	193	1893	492	1082
112	14	224	2202	573	1261
120	15	256	2515	658	1448
128	16	291	2859	747	1643
136	17	328	3217	848	1866
144	18	367	3600	946	2081
152	19	408	4001	1057	2325
160	20	451	4428	1171	2576

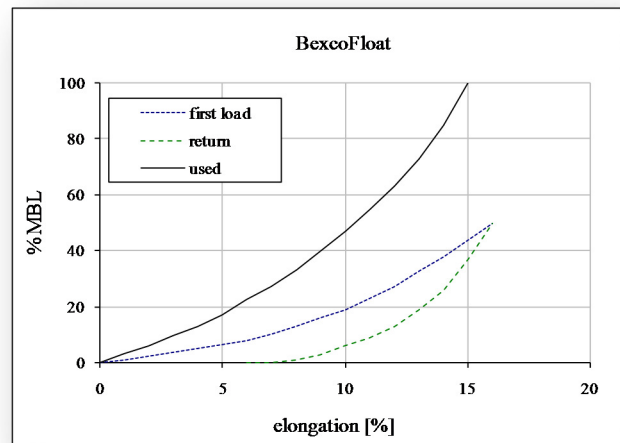

MBL = **M**inimum **B**reaking **L**oad conform ISO 2307

Other sizes available upon request

The information disclosed herein was originated by and is the property of **BEXCO** nv and its subsidiaries. **BEXCO** nv and its subsidiaries reserves all intellectual and industrial property rights such as any and all patent, trademark, design, manufacturing, reproduction use and sales rights thereto and to any article disclosed therein, except to the extent rights expressly granted to others.