


HMPE USD 12



Construction

Braided ropes consist of an equal number of interwoven clockwise and anti-clockwise strands. They are well established where ease in handling and non-rotating behaviour is important. They are produced on a braiding machine containing twelve reels, each containing one strand. The rope is slightly hollow.

Material Properties

Polyethylene is an amorphous plastic with relatively low tensile strength. Through gel spinning the crystals achieves a maximum orientation, this give the material a high strength and stiffness. And it is commonly known as **H**igh **M**odulus **P**oly**E**thylene. It has an extremely low coefficient of friction and is extremely resistant to internal and external abrasion. The thermal properties of HMPE are similar to ordinary Polyethylene.


Features

➤	Materials	Ultra – High Molecular Weight Polyethylene (Dyneema SK75)
➤	Construction	12 strand braided
➤	Treatment	Marine finish
➤	Colour of Rope	Grey (Others on request)
➤	Approx. Spec. Density	0,975 floating
➤	Melting point	145°C
➤	Abrasion Resistance	Excellent
➤	U.V. resistance	Good
➤	Temperature resistance	70°C max continuous
➤	Chemical resistance	Excellent
➤	Dry & wet conditions	Wet strength equals dry strength
➤	Range of use	Fishing, offshore installation mooring

Dia mm	Circ. "	Min Break Load		Weight	
		tf	kN	kg/100m	kg/coil
6	3/4	7,6	74,6	3,8	8,4
8	1	10,1	99,1	5,0	11,0
10	1 1/4	14,2	139,3	7,4	16,3
12	1 1/2	18,5	181,5	9,6	21,1
14	1 3/4	24,6	241	12,8	28,2
16	2	30,7	301	16,0	35,2
18	2 1/4	36,9	362	19,3	42,5
20	2 1/2	43,1	423	22,5	49,5
22	2 3/4	49,5	486	26,7	58,7
24	3	60,7	595	33,1	72,8
26	3 1/4	66,5	652	36,4	80,1
28	3 1/2	75,4	740	41,8	92,0
30	3 3/4	85,4	838	47,6	105
32	4	105	1029	60,2	132
36	4 1/2	123	1211	74,3	163
40	5	148	1447	89,9	198
44	5 1/2	171	1680	107	235
48	6	199	1953	126	277
52	6 1/2	226	2219	146	321
56	7	259	2538	167	367
60	7 1/2	289	2831	190	418
64	8	320	3139	215	473
68	8 1/2	354	3470	241	530
72	9	388	3806	268	590
76	9 1/2	427	4188	297	653
80	10	499	4896	360	792
88	11	576	5650	428	942
96	12	645	6325	502	1104
104	13	740	7263	582	1280
112	14	838	8220	668	1470
120	15	941	9231	760	1672
128	16	1050	10297	858	1888

All measurements conform ISO 2307

Other sizes available upon request

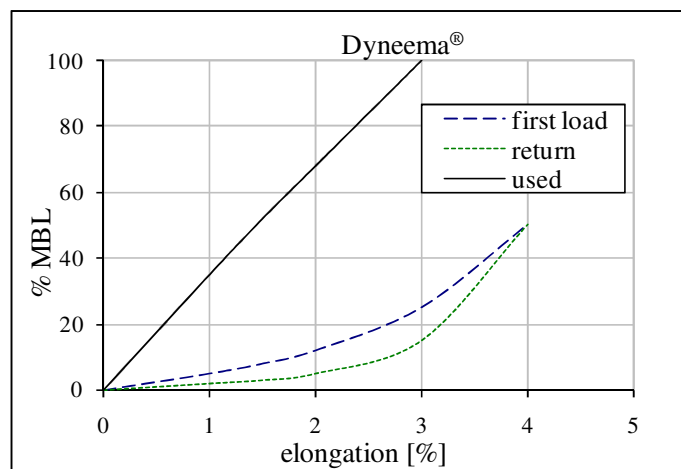

The information disclosed herein was originated by and is the property of BEXCO nv and its subsidiaries. BEXCO nv and its subsidiaries reserves all intellectual and industrial property rights such as any and all patent, trademark, design, manufacturing, reproduction use and sales rights thereto and to any article disclosed therein, except to the extent rights expressly granted to others.